


Creator Pro 2

Advanced | Reliable | Easy-to-use
Independent Dual Extruder System

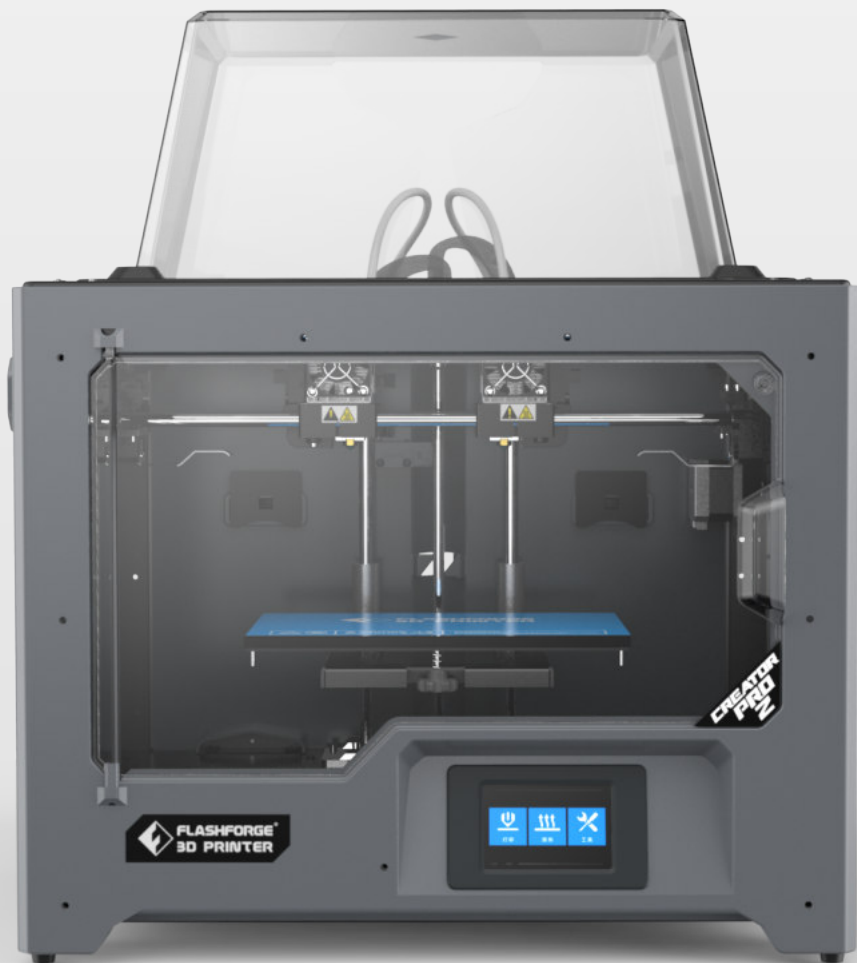

Creator Pro2 is the upgrade of the classical Creator Pro, with independent dual extruder system, productivity efficiency is faster and avoid to mixture of two filament in one object.

With touchscreen interface, the operation is simplified and easily. The classical closed machine structure ensures the printed results, especial for ABS printing.



Touchscreen interface
Closed printed chamber



Metal framework
Stable working performance



Support multiple materials
PLA, Pearl PLA, PVA, ABS, ABS Pro, HIPS




Independent dual extruder system
Support mirror printing mode, duplicate printing mode and soluble printing mode.




Build volume
200*148*150mm

Anti-scrape Design

Avoid scrap in the process of printing to get better printed results.

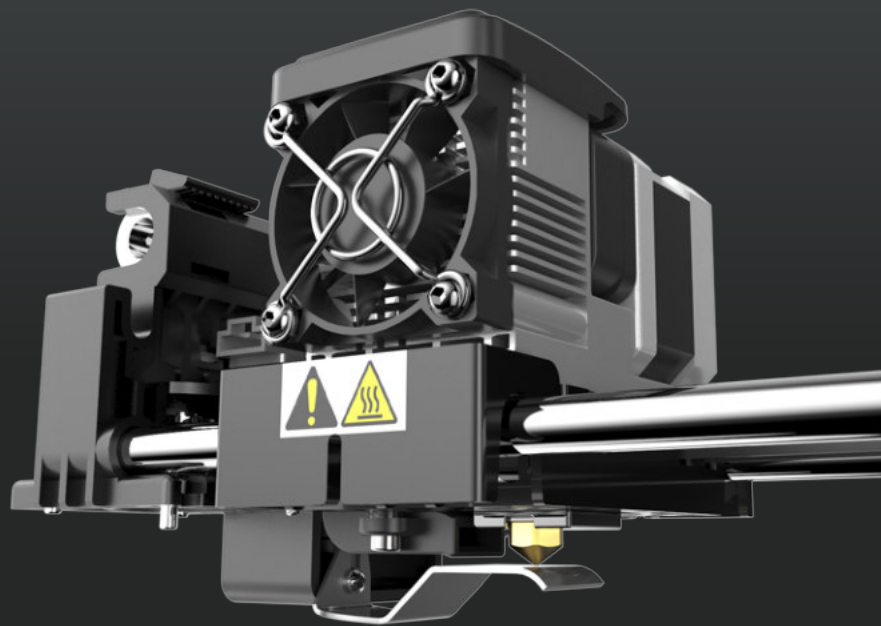

Nozzle Calibration

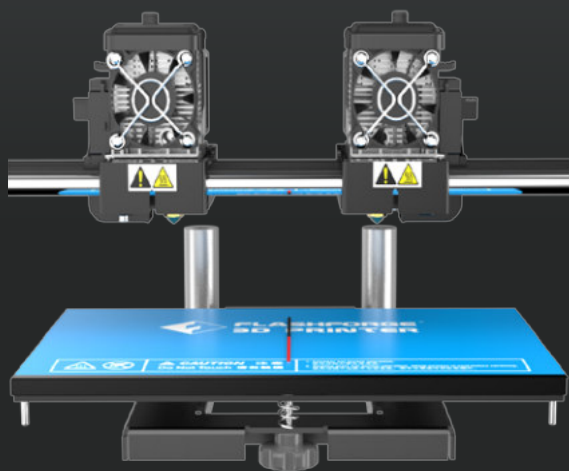


X-axis calibration



Y-axis calibration


Mirror Mode

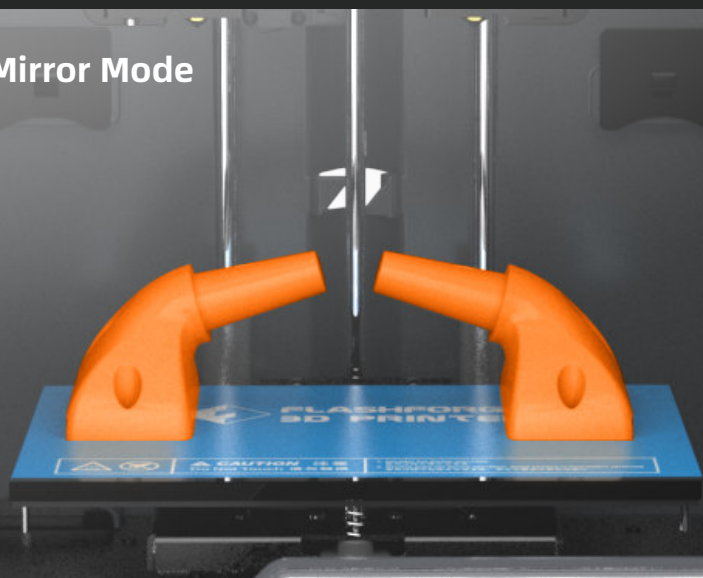


Duplicate Mode




Creator Pro 2 Printed Models

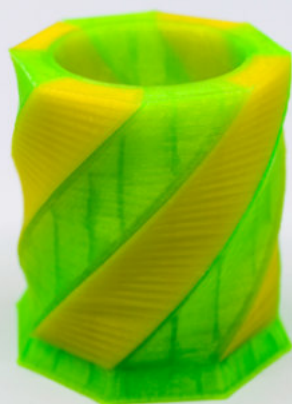


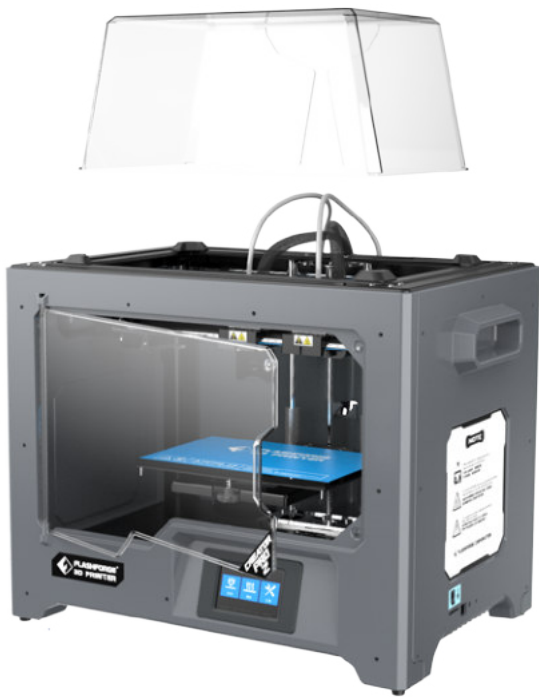

Open the front door and remove the top cover to let the air flow in, which is better for PLA printing.

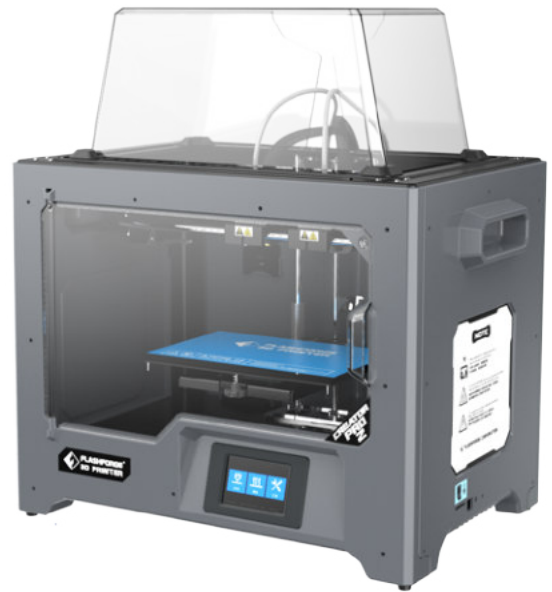

Close the front door and the top cover to build a closed chamber, which is better for ABS printing.

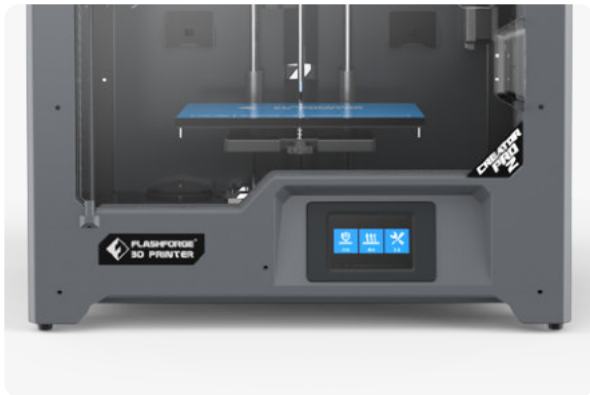

Touchscreen operation



SD card printing



Handle is designed for easy handling



Support two spool filaments in the back

PARAMETERS

PRINT

| | |
|---|---|
| Extruder number: | 2 |
| Extruder diameter: | 0.4mm |
| Highest set temperature of extruder: | 240°C |
| Build Volume: | 200*148*150mm |
| Mirror mode: 80*148*150mm; Duplicate mode: 95*148*150mm | |
| Print Speed: | 10-100mm/s |
| Highest set temperature of platform: | 120°C |
| Support Filament: | PLA, Pearl PLA, PVA, ABS, ABS Pro, HIPS |

DEVICE

| | |
|-------------------|----------------------|
| Printer Volume: | 526*360*403 (550) mm |
| Screen: | Touch Screen |
| Net Weight: | 15kg |
| Gross Weight: | 21kg |
| Power: | 100-240 VAC,47-63Hz |
| Internal Storage: | 320w |
| Spool: | External |

COMMUNICATION

| | |
|--------------------|--|
| Data transmission: | USB cable, SD card |
| Software: | FlashPrint |
| Output: | GX/G files |
| Input: | 3MF/STL/OBJ/FPP/BMP/PNG/JPG/JPEG files |