


Product Sheet


Simple, multi-material 3D Printing

Key Features



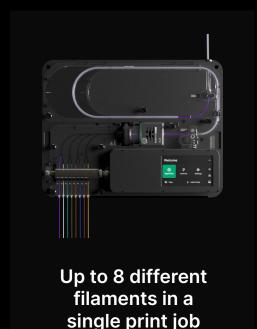


Improved, aluminum Splice Core, 10% faster than Palette 3

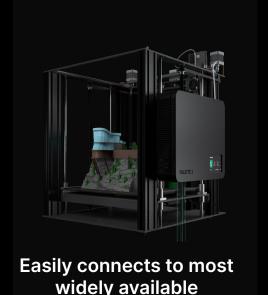

3D printers,

- Starting at \$899 USD
- Control remotely to start and monitor prints from anywhere
- ✓ Fully automated runout detection and spool changeover
- ✓ Built-in Canvas Hub for improved connectivity
- ✓ Cloud based print managment with Canvas software integration
- ✓ New UI and touch screen for unparalleled ease of use
- ✓ Durable PC-ABS and Aluminum₃ construction.
- ✓ Splices 10% faster than Palette 3 and rated for 2x as many lifetime splices.

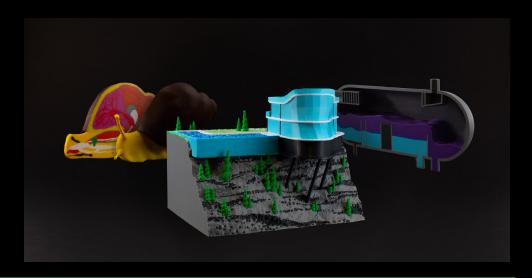

^{1.} Consult the Mosaic Manufacturing website for a full list of compatable 3D Printers. List subject to change.

PALETTE 3 PRO Specification Sheet

Recommended for	Professionals, Businesses, Hobbyists		
MSRP (USD)	\$799 USD		
Number of Inputs	8		
Filament Compatibility	1.75 ±0.03mm PLA, PETG, TPU, ABS, PVA, HIPS Shore hardness of 95A or harder		
Splicing Technology	3rd generation Splice Core PRO (P3-SCP)		
Splicing Speed	Up to 10% faster than Palette 3, 30% faster than Palette 2		
Filament Runout Detection	Yes		
Built-in Canvas Hub Functionality	Yes		
Software Compatibility	Canvas		
Browser Compatibility	Chrome, Firefox, Safari		
Internet Connection	Required for Canvas usage and firmware updates		
Control Interface	4" Touch Screen Canvas (via Web browser)		
Data Interface	Canvas (via WiFi / Ethernet)		
IO Ports	USB-A (2x) USB-B (1x) Ethernet (1x)		
WiFi	Yes (2.4Ghz, 802. 11 b/g/n) ₁		
Controllers	ARM Cortex M4 Processor & Compute Module: -Quad-core 1.4GHz ARM Cortex-A53 Processor -1GB LPDDR2 SDRAM -8GB eMMC Flash Memory		
Power	12V / 4A		
Product Dimensions (cm)	30.9 × 23.5 × 7.4 cm		
Product Weight (kg)	3.2 kg		
Warranty	24 months or 50,000 splices		
UPC Code	850226000847		

Palette 2S

Comparison Sheet


	Palette 25	Palette 3	Palette 3 Pro
	PALETTE 2	PARTIES	PALETTE 3
Number of Materials	4	4	8
Connectivity	Canvas Hub Required Canvas Hub Integrated		Integrated
Warranty	1 Year	1 Year	2 Year
Ethernet	No	No	Yes
Structural Material	PC-ABS, White	PC-ABS, White	PC-ABS, Black, Aluminum Splice Core
Interface	3.4" Color Screen	4" Color Screen	4" Color Screen
Splice Tubes Included	3	3	5
Spare Parts	Basic	Basic	Basic + Extra
Drive Technology	Independent Drive Motor	Mosaic Rotary Selector System	
Filament Buffer	Open-filament Loop	Constrained Filament Loop	
Speed (cut-cut time) ₂	43 seconds	32 seconds	29 seconds
Filament Diameter	1.75mm		
Compatability	Popular open printers such as Creality, Prusa, Artillery, Craftbot, Makerbot, Flashforge, Ultimaker ₃ and Lulzbot ₃		
Compatible Materials	Up to 250°C	Up to 250°C	Up to 250°C

Palette 3

Palette 3 Pro

^{1.} Although WiFi is featured, offline modes are available for both Palette 3 and Palette 3 Pro models
2. Cut-cut time is determined using 8cm segments and (0,0,0) splice tuning with Mosaic PLA. Larger segments and different splice tuning will affect cut-cut times.
3. Adaptor required for select 2.85mm printer models

Product Diagrams

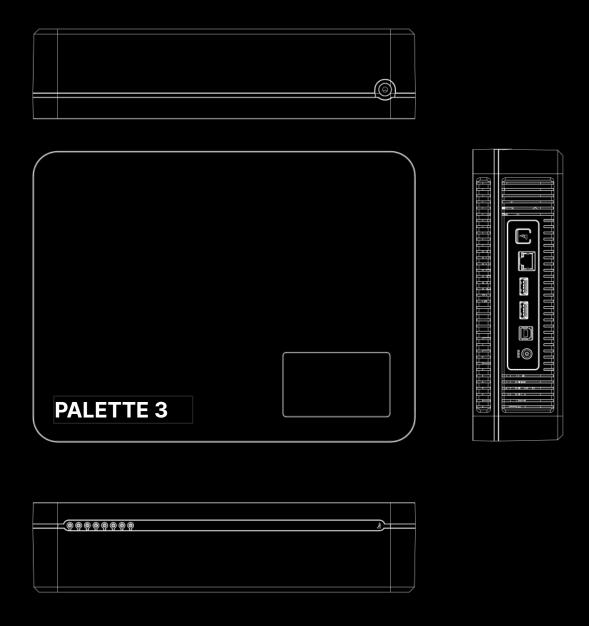

 $\textbf{Note:} \ \textbf{All diagrams and technical specifications are approximate and subject to change.}$



Mosaic Manufacturing Ltd. 480 University Ave, Unit 802 Toronto, ON M5G 1V2 Canada Sales@mosaicmanufacturing.com

© 2021 All Rights Reserved.